




# NVIDIA Jetson Orin Nano Series

The new standard for entry-level edge AI.

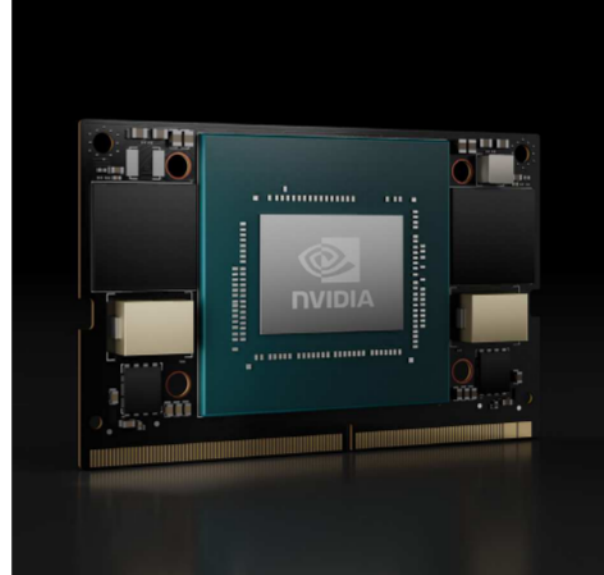

## Next-Level AI Performance in a Small, Power-Efficient Form Factor

NVIDIA® Jetson Orin Nano™-series modules deliver up to 40 TOPS of AI performance in the smallest Jetson™ form-factor, with power options between 7W and 15W. This gives you up to 80X the performance of NVIDIA Jetson Nano and sets the new standard for entry-level edge AI.

The system-on-module is pin-compatible with NVIDIA Jetson Orin™ NX and supports multiple concurrent AI application pipelines with high-speed IO and an NVIDIA Ampere architecture GPU. This enables lower-priced consumer, retail analytics, and industrial QA devices to benefit from more complex AI models.

Jetson runs the NVIDIA AI software stack, and use-case specific application frameworks are available, including NVIDIA Isaac™ for robotics, DeepStream for vision AI, and Riva for conversational AI. You can also save significant time with NVIDIA Omniverse™ Replicator for synthetic data generation (SDG) and NVIDIA TAO toolkit for fine-tuning pretrained AI models from the NGC™ catalog.

Jetson ecosystem partners offer additional AI and system software, developer tools, and custom software development. They can also help with cameras and other sensors, as well as carrier boards and design services for your product.

Jetson Orin modules are unmatched in performance and efficiency for robots and other autonomous machines. This gives you the flexibility to create the next generation of AI solutions with the latest NVIDIA GPU technology. Together with the world-standard NVIDIA AI software stack and an ecosystem of services and products, your road to market has never been faster.

## Key Features

### Jetson Orin Nano 4GB (P3767)

- > 512-core NVIDIA Ampere architecture GPU with 16 tensor cores
- > 6-core Arm® Cortex®-A78AE v8.2
- > 4GB 64-bit LPDDR5
- > Support for external NVMe

### Power

- > Voltage Input: 5V - 20V
- > Module Power: 7W - 10W

### Jetson Orin Nano 8GB (P3767)

- > 1024-core NVIDIA Ampere architecture GPU with 32 tensor cores
- > 6-core Arm® Cortex®-A78AE v8.2
- > 8GB 128-bit LPDDR5
- > Support for external NVMe

### Power

- > Voltage Input: 5V - 20V
- > Module Power: 7W - 15W

## Technical Specifications

	Jetson Orin Nano 4GB	Jetson Orin Nano 8GB
<b>AI Performance</b>	20 TOPS	40 TOPS
<b>GPU</b>	512-core NVIDIA Ampere architecture GPU with 16 tensor cores	1024-core NVIDIA Ampere architecture GPU with 32 tensor cores
<b>Max GPU Freq.</b>	625MHz	
<b>CPU</b>	6-core Arm® Cortex®-A78AE v8.2 64-bit CPU 1.5MB L2 + 4MB L3	
<b>CPU Max Freq.</b>	1.5GHz	
<b>Memory</b>	4GB 64-bit LPDDR5 34GB/s	8GB 128-bit LPDDR5 68GB/s
<b>Storage</b>	- (Supports external NVMe)	
<b>Camera</b>	Up to 4 cameras (8 via virtual channels*) 8 MIPI CSI-2 lanes D-PHY 2.1 (up to 20Gbps)	
<b>Video Encode</b>	1080p30 supported by 1-2 CPU cores	
<b>Video Decode</b>	1x 4K60 (H.265) 2x 4K30 (H.265) 5x 1080p60 (H.265) 11x 1080p30 (H.265)	
<b>PCIe</b>	1 x4 + 3 x1 (PCIe Gen3, Root Port, and Endpoint)	
<b>USB</b>	3x USB 3.2 Gen2 (10Gbps) 3x USB 2.0	
<b>Networking</b>	1x GbE	
<b>Display</b>	1x 4K30 multi-mode DP 1.2 (+MST)/eDP 1.4/HDMI 1.4	
<b>Other I/O</b>	3x UART, 2x SPI, 2x I2S, 4x I2C, 1x CAN, DMIC & DSPK, PWM, GPIOs	
<b>Power</b>	7W - 10W	7W - 15W
<b>Mechanical</b>	69.6mm x 45mm 260-pin SO-DIMM connector	

\* Virtual channel-related camera information for Jetson Orin Nano is not final and subject to change.

\*\* Refer to the Software Features section of the latest NVIDIA Jetson Linux Developer Guide for a list of supported features.

## Ready to Get Started?

Learn more at: [www.nvidia.com/jetson-orin](http://www.nvidia.com/jetson-orin)

© 2023 NVIDIA Corporation. All rights reserved. NVIDIA, the NVIDIA logo, Jetson, Jetson Nano, NGC, NVIDIA Isaac, NVIDIA Omniverse, and NVIDIA Orin are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and other countries. ARM, AMBA and ARM Powered are registered trademarks of ARM Limited. Cortex, MPCore and Mali are trademarks of ARM Limited. All other brands or product names are the property of their respective holders. "ARM" is used to represent ARM Holdings plc; its operating company ARM Limited; and the regional subsidiaries ARM Inc., ARM KK, ARM Korea Limited., ARM Taiwan Limited, ARM France SAS, ARM Consulting (Shanghai) Co. Ltd.; ARM Germany GmbH; ARM Embedded Technologies Pvt. Ltd.; ARM Norway, AS and ARM Sweden AB. Other company and product names may be trademarks of the respective companies with which they are associated. 2659311. FEB23.

